

# ENERGO CASSETTE®

Electric Ceiling Heating System



**GENTLE HEAT**



**FROM THE CEILING - A COMFORTABLE  
AND ENERGY EFFICIENT HEATING**



EnergoCassette can be used in false ceilings (T-bar) or directly onto the ceiling on supplied brackets. The heater is suitable for installation up to appr. 3.5m ceiling height. It has a low surface temperature, no greater than 100°C and emits a gentle and comfortable heat. EnergoCassette is approved in spray-safe IP55 design for wet, dry and fire hazard areas. Suitable for a wide range of installations from schools to stables. Frees valuable wall and floor surfaces with energy savings of 15-30%.

Energocassette ceiling heating system are the most natural and comfortable way to heat your premises. Energocassette gently radiates, low temperature heat to floors, walls and objects in the room, just as the sun heats the earth. As a result you can lower the air temperature in the room and yet achieve the same warmth comfort with energy savings of 15-30%.

The low surface temperature makes the Energocassette especially suitable for low ceiling heights and it may be fitted to the ceiling up to appr. 3.5m. The stylish and elegant design therefore suits projects like offices, schools, hospitals, houses etc. With the approval of spray-safe IP55  $\triangle\triangle$  design for wet, dry and fire hazard areas, it may be used in shower areas and the agriculture and pulp industries etc.

Energocassette is an universal model, designed for fitting flush into a "T-Bar", (15-24mm), false ceiling or fitted directly onto the ceiling on supplied ceiling fixing brackets, (see fig. 3). As it is ceiling mounted it frees valuable wall and floor space. Furthermore it is safely away from contact and damage which is an advantage for use in public places.

Energocassette comes in standard white powder coated finish and is available in two models, ENC300 and ENC600 at 230-240V, see table.

Energocassette is approved for permanent installation by an authorised electrician. Cable connections are to a 4mm<sup>2</sup> terminal in the junction box on top of the heater. Connections between several heaters are possible.

Heat control is simply carried out with use of our room thermostats or where a large number of heaters are fitted, one of our automatic control panels may be used, (see separate brochure).


Type	230-240V~	L	W	H	C/C	kg
ENC 300	300-327 W	59,3 cm	59,3 cm	4,5 cm	27,5 cm	5,5
ENC 600	600-655 W	119,3 cm	59,3 cm	4,5 cm	37,0 cm	10,0



Energocassette in suspended false ceiling system (T-bar)...



and fitted direct onto the ceiling.

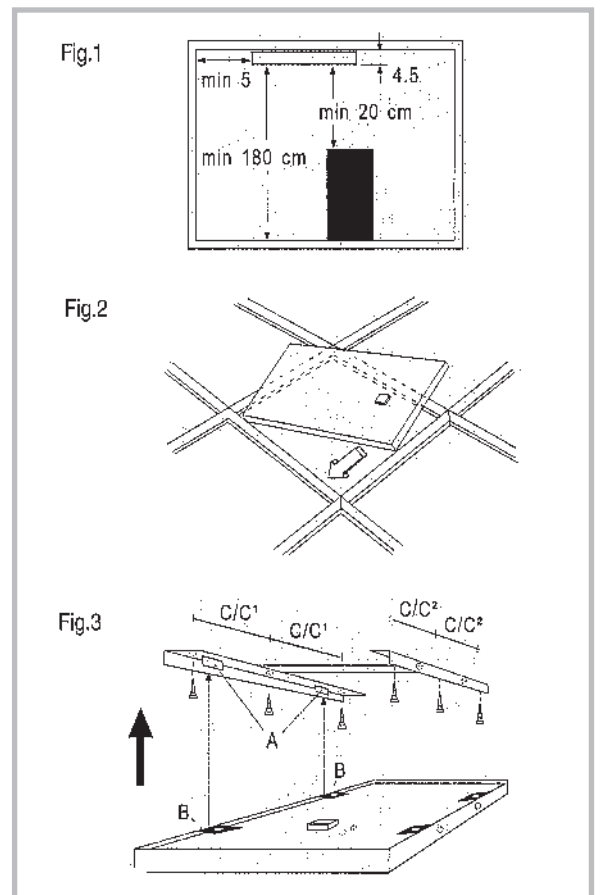

**ENERGOTECH**

Box 8053, SE - 200 41 Malmö, Sweden  
 Tel. +46-(0)40-866 94, Fax +46-(0)40-19 48 20  
 E-mail: sales@energotech.se Web: www.energotech.com